




POLIPASTOS
DE MÉXICO S.A. DE C.V.

Regular Type Hoist with Motor-Driven Trolley (FT) 2.5 Ton

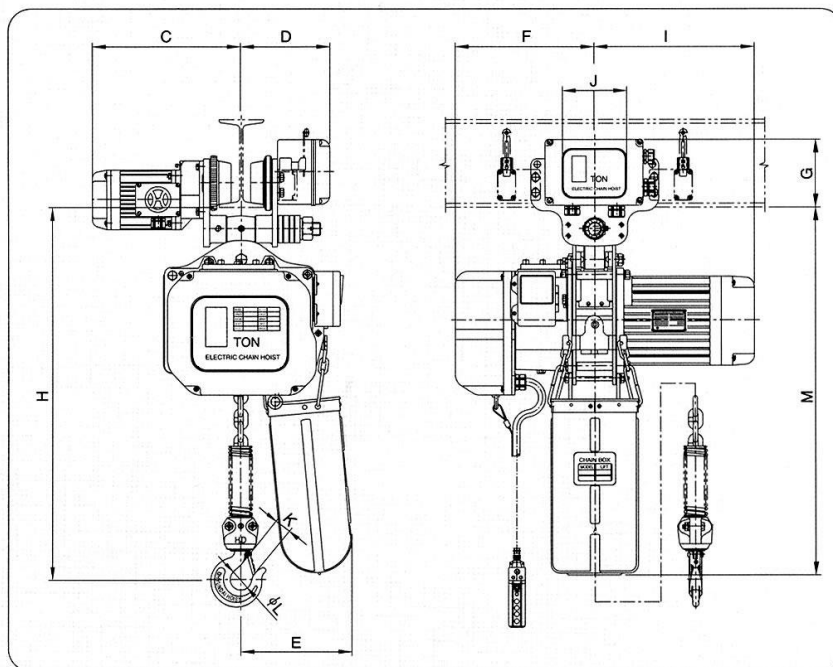

Specifications

Capacity (kg)	Model	Lift (m)	Rating (min)	Hoisting Speed (m/min)		Hoisting Motor (kW)	Traversing Speed (m/min)		Traversing Motor (kW)	Load Chain (dia. × falls)	Net Weight (kg)	Beam Width (mm)	Min Radius for Curve (mm)
				50Hz	60Hz		50Hz	60Hz					
1500	FT-S150	4	30	8.6	10.3	3.5	16.6	20	0.25	9.5 × 1	165	100-150	1200
1500	FT-D150			8.6/4.3	10.3/5.15	3.5/1.75					170		
2000	FT-S200			6.8	8.2	3.5	8.3	10	0.13	11.2 × 1	170		
2000	FT-D200			6.8/3.4	8.2/4.1	3.5/1.75					175		
2500	FT-S250			5.4	6.5	3.5	16.6	20	0.4	11.2 × 1	195	100-150	1500
2500	FT-D250			5.4/2.7	6.5/3.25	3.5/1.75	11	13	0.2		200		

Dimensions (mm)

Model	Sym.	C	D	E	F	G	H	I	J	K	L	M
FT-S150		345.5	211.5	248	314	157	674.5	360	145	36	48	831
FT-D150		345.5	211.5	248	314	157	674.5	360	145	36	48	831
FT-S200		345.5	211.5	248	314	157	699.5	360	145	36	48	831
FT-D200		345.5	211.5	248	314	157	699.5	360	145	36	48	831
FT-S250		380	271.5	248	314	157	716.5	360	140	45	58	852
FT-D250		380	271.5	248	314	157	716.5	360	140	45	58	852