




# Electric Trolley Model TE



Capacity: 0.5-10 Ton

Specially recommended for loads over 500 kg, for transporting over long distances and/or when used frequently. Suitable for almost all hoists with coupling rings.

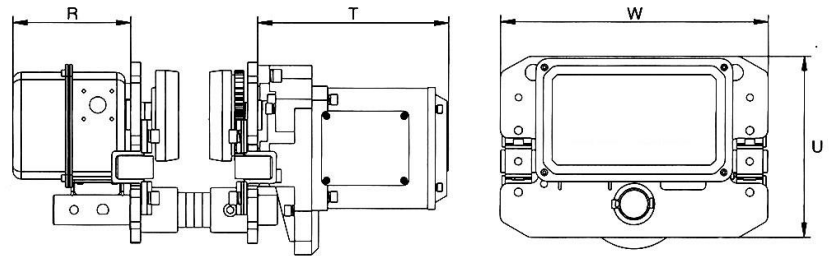

## Features

- Compact, robust frame with low overall height.
- Motors protected to IP 54 against dust and spray water.
- Wheels manufactured from fracture-proof steel.
- Smooth running due to machined surfaces and ball bearing mounting. Cambered profile suitable for parallel and inclined beam profiles.
- Anti-tilt and anti-drop devices as standard.
- Easy adjusted to fit to a wide range of beam widths and profiles due to threaded spindles.
- Dual speed mode, and double axle type trolley are available, contact with us for details if request.



## Technical · Size Specification

Capacity (t)	Model	Travel speed (m/min)	Motor Power (Kw)	Beam flange width (mm)	Size dimension (mm)				Min. Radius curve (m)	Net weight (kg)
					W	U	R	T		
0.5	TE005	11 Or 21	0.4	68-130	315	212	142	231	0.8	41
1	TE010	11 Or 21	0.4	68-130	315	212	142	231	0.8	42
2	TE020	11 Or 21	0.4	82-153	325	220	142	231	0.9	49
3	TE030	11 Or 21	0.75	82-153	340	250	142	231	1.0	61
5	TE050	11 Or 21	0.75	100-178	430	306	142	231	1.5	83
7.5	TE075	11 Or 21	0.75	150-220	430	306	142	231	1.8	89
10	TE100	11 Or 21	0.75	150-220	500	371	142	231	2.5	140